

EDIC-mini Tiny16 A14

Digital Recorder

OPERATION MANUAL

Version: March, 2013

© TS-Market

Short Operating Instruction for Digital Recorder EDIC-mini Tiny16 A14 300h/600h/1200h/2400h

Overlook

Digital recorder Edic-mini Tiny16 A14 is a professional device intended for making high quality record of voice messages into built-in flash memory. The recordings can be further uploaded onto the PC. The recorder can be used simultaneously both as a voice recorder and a flash drive to store and transfer data of any standards.


Specifications:

- VAS (Voice Activation System) to compress pauses while recording;
- Circular recording mode;
- Built-in real time clock;
- Timers to start recording at the preset time;
- Information protection system.

PC system requirements

OS Windows XP, Windows Vista, Windows 7, 8.

Recorder's Appearance

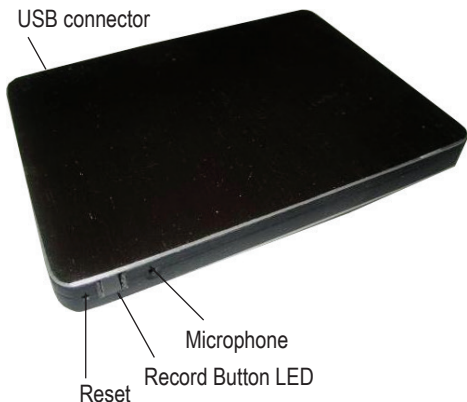

Supplied Software makes it possible to:

- Save the recorded messages on the PC as standard sound files;
- Restore compressed pauses when uploading files onto the drive;
- Set the recorder's parameters;
- Apply password protection of the access to the recorder's settings and information;
- Update software.

Technical Characteristics

Last digits in the models' names specify the maximum recording duration in hours (built-in memory capacity) for the Mode: 8 kHz, and compression 2-bit ADPCM)

- Battery life in record mode (8 kHz, without compression, battery fully charged): up to 500 hours;
- Battery life in stand-by mode: up to 5 years;
- Battery life in record mode with VAS (audio signals below threshold): up to 1500 hours;
- Exchange rate: up to 0,7 Mb/s
- Frequency band: 0,1-10 kHz
- Signal-to-noise ratio: 80 dB
- Built-in microphone sensitivity: 10..12 m
- Storage life of built-in flash memory: at least 10 years
- Battery type: Li-Pol, 2000 mAh
- Case: metal, plastic
- Dimensions: 90x60x7 mm
- Weight: 68 g
- Operating temperature range: 0÷40 °C

Getting Started

Recording.

Press the Rec button and keep it for about 2 seconds.

When the recorder starts recording, the LED flashes five times. While recording, two series of LED flashes show battery charge and free memory size (for more details see Instructions in the internal memory of the Recorder). To stop recording press the Rec button and keep it for 2 seconds. The LED flashes once, the duration of the last flash depending on the recorder's memory size.

Record Playback

Connect USB cable to the Recorder, then to the USB port of the PC. The system recognizes a new storage device. Launch «RecManager.exe» from it. The content of the Recorder is on the left side of the window. Select the recording, right-click and select "Copy to PC". The recording will be converted to WAV and appears at the right side of the window. To play back the recording left-click it twice. To connect the Recorder off the PC connect USB cable off the PC, after that connect it off the Recorder.

Instructions

Operating instructions for the Recorder and RecManager are located in the internal memory of the Recorder in “Instructions Tiny16 Operational Manual.pdf” and “Tiny 16 RecManager Manual.pdf». It is recommended to copy the contents of the storage device onto the hard drive of the PC to solve all the possible problems with the Recorder.

In Box:

1. Recorder;
2. USB cable;
3. Instructions.

Battery Charging

Connect USB cable to the Recorder, then to the USB connector of the PC. The LED flashes once to indicate charging started. While charging, the recorder's LED is flashing gradually with a five-second interval. When the rechargeable battery is fully charged the LED flashes without intervals. Connect the cable off the PC. After a short pause the LED flashes once. Charging takes 6 hours.

Attention! If you don't use the Recorder for a long time it is necessary to charge the battery at least once a year.

Manufacturer Warranty Coupon

The manufacturer undertakes warranty repair liabilities for 1 year from the date of purchase, but no longer than 2 years from the date of manufacture of the product (warranty does not cover batteries). Paid repair is provided within recorder's operation lifetime (5 years). The manufacturer reserves the right to refuse in repair after the expiration of recorder operation life

This warranty is voided if the recorder is:

- improperly used
- mechanically damaged
- received without supplier warranty tag on this document

All questions regarding product exchange and return must be solved with the seller's company according to Protection of Consumers Law.

Digital Recorder EDIC-mini Tiny16 A14

300h 600h

1200h 2400h

Number: _____

QC: _____

Selling date: _____

Seller: _____

Address:

TS-Market Ltd.

Building 10/1 Sosnovaya Alleya, Zelenograd,
Moscow, The Russian Federation, 124489

Tel: +7 (495) 638-8800; +7 (495) 651-91-51

(Cell) +7(903) 530-10-01, +7 (909) 638-88-00

Fax: +7 (495) 535-0491

E-mail: support@ts-market.com

<http://www.ts-market.com>

GPS coordinats:

55.98065 N

37.25224 E