

# **Short Operating Instruction for Digital Recorder EDIC-mini Pro B42-300h/600h/1200h**


## **Overlook**

Digital Recorder EDIC-mini Pro B42 is a professional device intended for making high quality record of voice messages into built-in flash memory. Recorded messages can be played back with headphone. USB 2.0 Interface provides high exchange speed between the recorder and the PC. The Recorder can be used simultaneously as a voice recorder when recording messages and a flash media when storing and transferring data of any standards (under “RecManager” control).

## **Specifications:**

- Metallic case;
- Two-line OLED indicator 104x16 px;
- VAS (Voice Activating System) to compress pauses while recording;
- Built-in real time clock;
- Timers to turn the recorder on every day at the preset time or for a single reclosure of the record;
- Circular recording mode.

## Recorder's Appearance

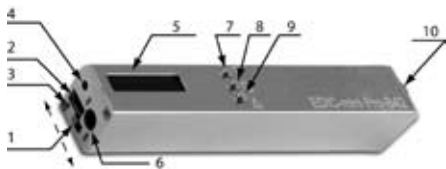

### Legend Keys:

1. Switch: – «Stop»; – «Record»;
2. USB connector;
3. LED;
4. Microphone;
5. Display;
6. Headphone connector;
7. Button ▽
8. Button □
9. Button △
10. Lid;
11. «Reset» button; «Record» «Stop»

**Supplied Software (available on the recorder's built-in Flash memory) makes it possible to:**

- Save the recorded messages onto the PC as standard sound files (WAV);
- Restore compressed pauses when uploading files onto the drive;
- Set the DVR parameters;
- Apply password protection of the access to the recorder's settings and information;
- Update software;
- Randomly delete the records.

**Technical Characteristics:**

- Battery life in record mode (8 K Hz, without compression) at the fully charged battery: up to 4,5 days;
- Battery life in stand-by mode: up to 1 year;
- Battery life in record mode with VAS (audio signals below threshold): up to 1,5 week;
- Last digits in the models' names specify the maximum recording duration in hours (built-in memory capacity) for the recording mode: sample rate 8 kHz, and 2 bit ADPCM:
  - 300h: 300 hours 2 Gb
  - 600h: 600 hours 4 Gb
  - 1200h: 1200 hours 8 Gb

- Exchange rate: up to 5, 5 Mb/s;
- Frequency band: 0,1-6 kHz;
- Signal-to-noise ratio: 72 dB;
- Built-in microphone sensitivity: 7–9 m;
- Storage life of built-in flash memory: up to 10 years;
- Battery: AAA;
- Operating temperature range: 0–40 °C;
- Dimensions: 94x13x13 mm;
- Weight (battery not included): 16 g;
- Operating lifetime: 5 years. (The manufacturer reserves the right to refuse in repair after the expiration of recorder operation life)

## **Starting and Testing the Recorder**

### **Recording.**

Insert the battery. Push the button (position 8). After a short pause the Recorder will go to “Rec” mode, the display showing “Rec” icon. Red LED (position 3) will start flashing. To stop recording push the button (position 8).

### **Playing back with Headphone**

To playback the record push the button (position 9). The display will read “Play record”. Push the button

(position 8) and after a short pause push the button (position 8) again. To stop playing back push the button (position 8).

## **How to read Instructions**

Connect the PC to the USB 2.0 connector with the help of USB cable (included into the package). Keep the middle button pressed until the display reads “USB 2.0 active”. After that the system discovers a removable media. Open it. Open the file “Instructions” by double-clicking it.

## **Battery Installation**

To install the battery unscrew the lid (position 10) and insert the battery into the case up to the stop (carefully observe the polarity – the positive battery contact is to be upward). Screw the lid (position 10). In case the Recorder doesn't turn on after the battery is installed, push the “Reset” button (position 11). The Recorder will turn on. Recorder settings will be saved.

## **In Box**

1. Recorder;
2. Headphone;
3. USB cable to connect to the PC;
4. 2 AAA batteries;
5. Plastic screwdriver;
6. CD with Software;
7. Instructions.

## **Accessories:**

1. Remote Control with remote amplifying microphone;
2. Telephone circuit adapter "RecAdapter"

For more details see Operational Manual on the shipped CD (or flash drive). It is also available on our website [www.ts-market.com](http://www.ts-market.com)

## **Manufacturer Warranty Coupon**

Warranty: **The Telesystems Company** provides warranty repair for 1 year from the selling date, but not more than 2 years from the manufacturing date (warranty does not cover batteries). Paid repair is provided within recorder's operation lifetime (5 years).

This warranty is voided if the recorder is:

- improperly used
- mechanically damaged
- received without supplier warranty tag on this document

All questions regarding product exchange and return must be solved with the seller's company according to Protection of Consumers Law.

## Digital Recorder EDIC-mini Pro B42

300h

600h

1200h

Number: \_\_\_\_\_

QC: \_\_\_\_\_

Selling date: \_\_\_\_\_

Seller: \_\_\_\_\_

### **Address:**

TS-Market Ltd.

Building 10/1 Sosnovaya Alleya, Zelenograd, Moscow,  
The Russian Federation, 124489

Tel: +7 (495) 638-8800;

(Cell) +7 (903) 716-22-14

E-mail: [support@ts-market.com](mailto:support@ts-market.com)

<http://www.ts-market.com>

GPS coordinats :

55.98065 N

37.25224 E